

## OmniCure High Power Fiber Light Guide

### Delivers High Output UV Curing Energy Exactly Where You Need It and How You Need It

The OmniCure® High Power Fiber Light Guides (HPFLG) are ideal for use when multiple outputs with equal intensities to each output are required. Excelitas Technologies' proprietary fused fiber bundle and higher Numerical Aperture (NA) allow OmniCure HPFLGs to capture maximum light power from the UV curing light source and provide a high performance UV solution. Fiber light guides are virtually free of optical degradation compared to liquid light guides.

Improves UV high power transmission from the light source to multiple curing sites

Reduces UV manufacturing costs with faster curing time, higher yields and improved power efficiency

Delivers equal distribution (+/-5%) of light energy to curing sites from a single light source for repeatable, high quality results

Multi-legged guides provide 25%-50% higher throughput than comparable multi-legged liquid light guides to transmit greater energy from the lamp

Offers a wide range of standard light guides (3mm, 5mm, multi-leg) and output adaptors (cure ring, light line, collimator, 90° angle) to meet customers' specific needs






FEATURES	BENEFITS
No optical degradation resulting in longer lifetimes than liquid light guides	Eliminates liquid light guide replacement costs
Higher output than comparable multi-legged liquid light guides	Improves lamp usable lifetime and reduces operating costs
Balanced output through multiple legs (+/-5%)	Provides higher yields for your curing processes and faster manufacturing equipment setup time
Transmitted light wavelengths from 160nm to 1200nm	Enables tack-free UV light curing for most adhesives

# OmniCure High Power Fiber Light Guide

## GENERAL SPECIFICATIONS

Spectrum Range	160 nm to 1200 nm
Multi-legged Output Balancing Tolerance	+/-5%
Numerical Aperture (NA):	0.37

**Beam Profiles with the OmniCure® S2000** Additional beam profiles available, please contact our sales department.

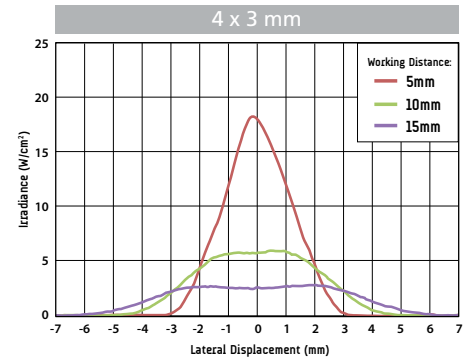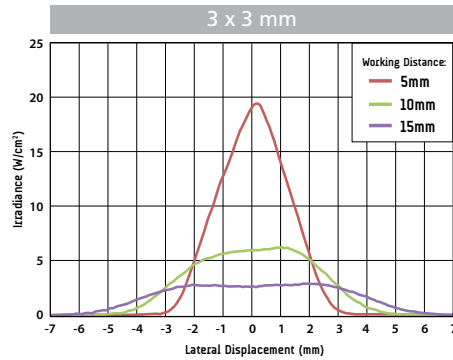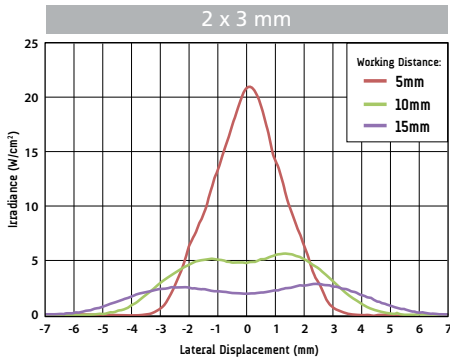

Typical irradiance measurements with a tolerance of +/- 10% (System lamp lifetime: < 100 hours).

## Typical Output

HPFLG	Average Irradiance (W/cm²)**			Power (W)*		
	S2000	S1500	S1000	S2000	S1500	S1000
2 x 3 mm	22.6	22.8	18.7	1.6	1.6	1.3
3 x 3 mm	20.0	23.2	14.3	1.4	1.5	1.0
4 x 3 mm	17.9	18.1	11.5	1.3	1.3	0.8

\* Total power measured by an OmniCure R2000 Radiometer (Working distance: 0 mm).

\*\* Average irradiance: Power at the individual leg output of the light guide divided by the output area.

## Light Guide Cross Section



High Power Fiber Light Guide




Standard Randomized Fiber Light Guide

The uniform distribution of the fibers within the High Power Fiber Light Guide allow an equal distribution of light energy among each leg in a multi-legged Light Guide.

## Light Guide Output Dimensions

Core	End Fittings					Tube	Min. Bend Radius
	∅1	∅2	∅3	∅4	∅5		
3 mm	5 mm	9 mm	20 mm	25.2 mm	7 mm	40 mm	
5 mm	7 mm	10 mm	20 mm	25.2 mm	9.5 mm	60 mm	

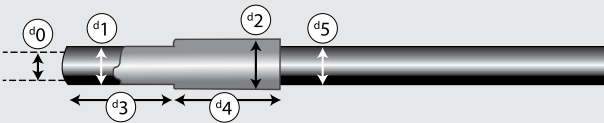

## Ordering Guideline

Light Guide	Length	Part Number
2 x 3 mm	1000 mm	806-00005
3 x 3 mm	1000 mm	806-00007
4 x 3 mm	1000 mm	806-00006

Additional configurations available; please contact our sales department at [OmniCure@excelitas.com](mailto:OmniCure@excelitas.com).

To learn more about OmniCure UV curing solutions, please visit [www.excelitas.com/omnicure](http://www.excelitas.com/omnicure).



[www.excelitas.com](http://www.excelitas.com)  
omnicure@excelitas.com

2260 Argentia Road  
Mississauga, Ontario  
L5N 6H7 CANADA

Telephone: +1 905 821-2600  
Toll Free (USA and CAN): +1 800 668-8752  
Fax: +1 905 821-2055

For a complete listing of our global offices, visit [www.excelitas.com/locations](http://www.excelitas.com/locations)

© 2015 Excelitas Canada Inc. OmniCure® is a registered trademark of Excelitas Canada Inc. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks are the property of their respective owners, and neither Excelitas Technologies Corp., its affiliates or subsidiaries, or any of their respective products, are endorsed or sponsored by or affiliated in any way whatsoever with those organizations whose trademarks and/or logos may be mentioned herein for reference purposes. Excelitas Canada Inc. reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.